



Interactive Flat Panel Display

TA-65HL/TA-75HL/TA-86HL

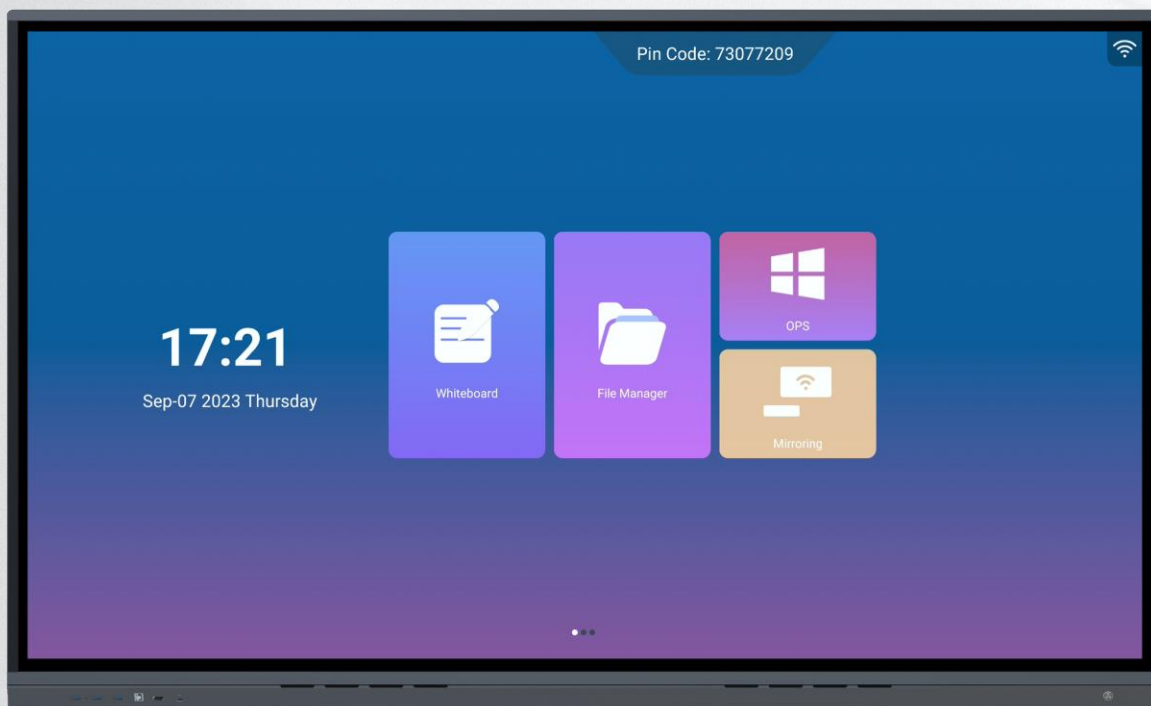

UHD
Resolution



4GB RAM
32GB ROM



20 touch
points



Android 13



Share screen



USB Type-C



Zero
bonding



Split screen

Display

Size	65inch	75inch	86inch
Type	DLED		
Aspect ratio	16:9		
Screen display size (mm)	1428*803	1646*925.5	1895.04*1065.96
Physical resolution	3840 × 2160 (4k)		
Display color	10bit/1.07 Billion		
Refresh rate	60Hz		
Brightness	≥400cd/m ²		
Contrast	4000:1		
Response time	6ms		
Viewing angle	178°/ 178°		
Display protection	4mm full tempered high explosion-proof glass		
Backlight life	50000 hours		

System

CPU	Quad-core ARM Cortex-A55
System version	Android 13.0
RAM	4GB
ROM	32GB
Operating system	Support Windows, Android, Mac OS, Linux
Operating temperature	0°C-40°C

Touch

Technology	IR
Touch points	20 points
Positioning Accuracy	1mm
Writing method	Fingers, touch pens or other non-transparent objects not less than 5mm in diameter
Palm erase	Yes
Communication Port	USB 2.0
Reaction time (Single touch)	< 6ms
Touch resolution	32768 x 32768
Times of touches	Unlimited time in theoretical
Transfer speed	12Mb/s

Connectivity

Back port

HDMI IN	x2
USB-A 2.0	x1
USB-A 3.0	x1
USB Touch	x1
TF Card	x1
COAX	x1
RS232	x1

Interactive Flat Panel Display



AV IN	x1
AV OUT	x1
Earphone	x1
Mic in	x1
RJ45 IN	x1
RJ45 OUT	x1
WIFI	Support IEEE 802.11 a/b/g/n/ac
OPS-PC Slot	x1
Front port	
HDMI IN	x1
USB Touch	x1
USB-A 3.0	x3
Type-C	x1

Dimension

Overall dimensions (mm, L×W×T)	1486*901.3*89.1	1708*1026.5*89.1	1954*1165*89.1
Net weight	37.7kg	51.5kg	67.2kg
Gross weight	46.5kg	64.6kg	85.2kg
Packaging size (mm, L×W×T)	1600*205*1001.5	1846*215*1180	2092*215*1319
VESA	500x400	600x400	800x400

Power Supply

Consumption rate	≤190W	≤230W	≤320W
Standby power	≤1W		
Voltage range	AC100-240V~50/60Hz		
Speaker specification	2 x 15 watts		



Accessories

Power cable	x1
Remote control	x1
Wall mount	x1
HDMI & Touch USB cable	x1
Whiteboard pen	x2



Built-camera and mic parameter (optional)

Microphones	8 integrated microphones
Pickup distance	10m
Sample rate	Sampling frequency 48K Hz; sampling number 24bit
Features	Full duplex, echo cancellation, noise suppression
Camera resolution	Support 1080P
Camera	48 Megapixels, top x 1
Camera lens angle	Not less than 90 degrees



65''

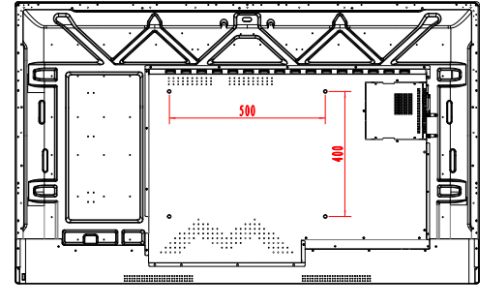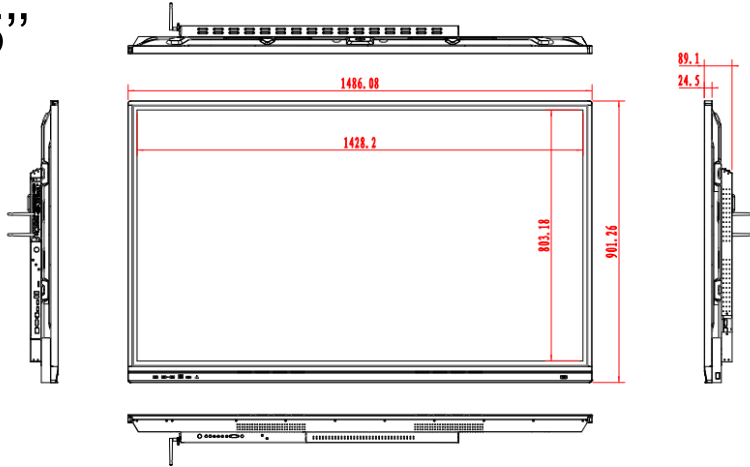

75''

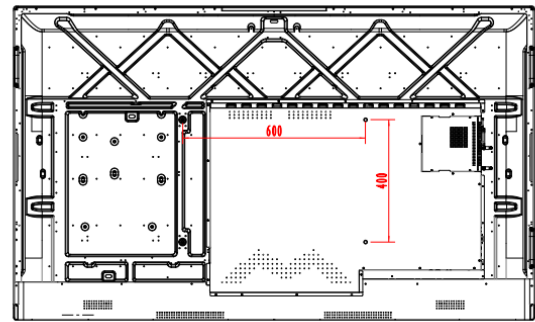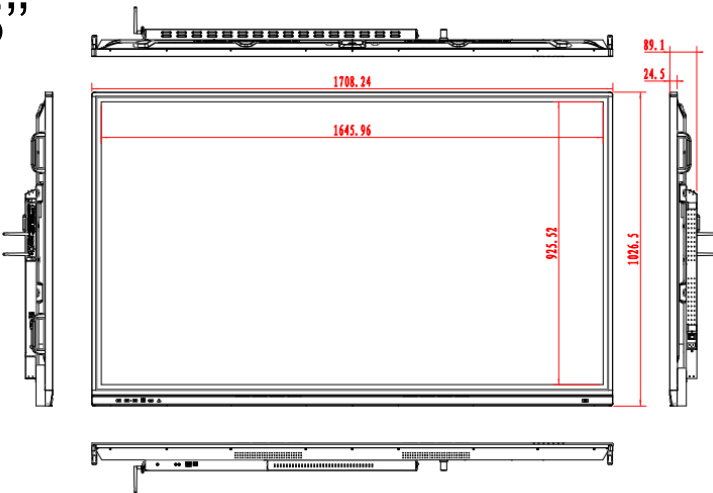

86''

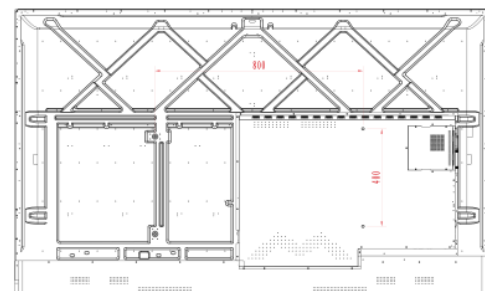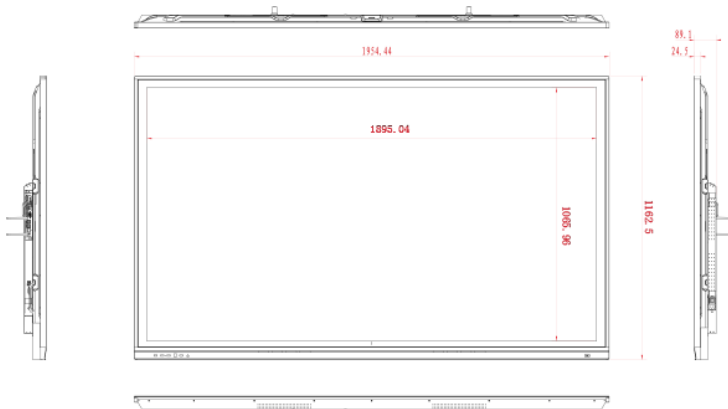

Details are subject to change without notice